


# Getting Connected



- Use the optical cable to connect from the optical output on your TV to the optical input on the SmartTVOke (set TV to PCM), OR use the 1/8" audio cable to connect from the headphone jack on your TV to the Audio In on the SmartTVOke.
- Use the 1/8" to RCA cable to connect from the Audio Out on the SmartTVOke to the Input on the PV-Wedge.
- Plug the SmartTVOke into an outlet and power it on. Insert batteries into the wireless mics and power them on. Check the Mic 1 and Mic 2 status lights to ensure the microphones are connected. (If the microphones are not pairing, check [Pairing the Microphones](#) on **page 13** of the SmartTVOke manual)
- Plug the PV-Wedge into an outlet and power it on. Turn the volume up and speak into the mics to check that you are getting sound.

- Use the included hardware to screw the DJ-Smart-Lightshow onto the bracket for the stand.
- Plug in the DJ-SLS and it will power on immediately. Press SOUND on the remote to enter Sound mode, and use the SEN+ and SEN- buttons to match the light's sensitivity with your music volume.

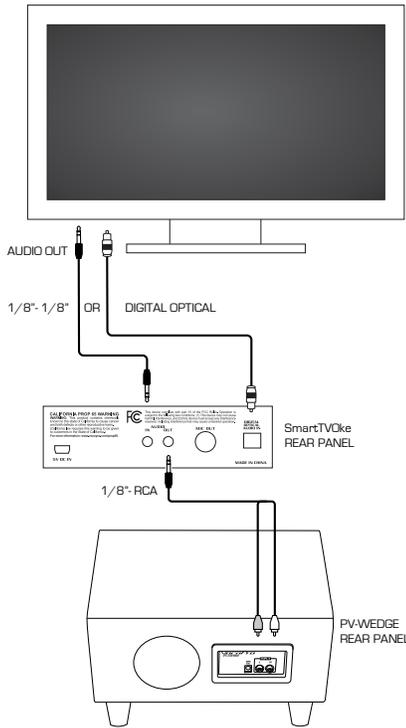